




User Guide

HOME PHONE PACK
BT FREESTYLE 4500



Welcome...

to your BT Freestyle 4500 digital cordless telephones and answering machine

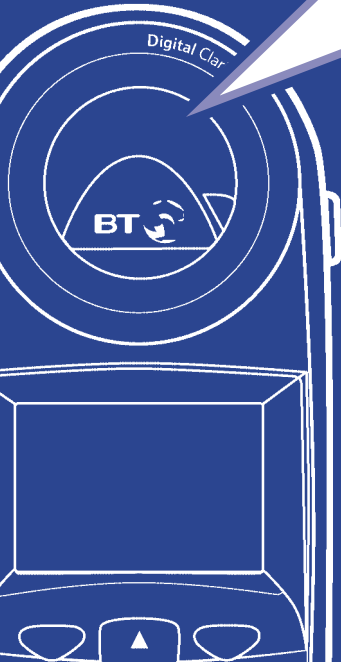

Depending on which BT Freestyle 4500 product you have purchased you will have either or all of these handsets:

- Kitchen – with a wipe clean keypad and rubber grips.
- Bedroom – with built-in torch.
- Lounge – stylish design and colour to fit in with most decors.

This User Guide provides you with all the information you need to get the most from your phone.

You must first set up your product before you can use it. This doesn't take long as it is easy to do. Just follow the simple instructions on the next few pages.

■ **Need help?**

If you have any problems setting up or using your BT Freestyle 4500 please contact the Helpline on **0870 240 3962**.

Alternatively, you may find the answer in 'Help' at the back of this guide.

Got everything?

BT Freestyle 4500

- BT Freestyle 4500 base
- BT Freestyle 4500 Lounge handset
- 2 x NiMH AAA rechargeable batteries
- 1 x mains power adaptors
- 1 x belt clips
- Telephone line cord

BT Freestyle 4500 Twin

- BT Freestyle 4500 base
- BT Freestyle 4500 charger
- BT Freestyle 4500 Lounge handset
- BT Freestyle 4500 Bedroom handset
- 4 x NiMH AAA rechargeable batteries
- 2 x mains power adaptors
- 2 x belt clips
- Telephone line cord

BT Freestyle 4500 Trio

- BT Freestyle 4500 base
- 2 x BT Freestyle 4500 chargers
- BT Freestyle 4500 Lounge handset
- BT Freestyle 4500 Bedroom handset
- BT Freestyle 4500 Kitchen handset
- 6 x NiMH AAA rechargeable batteries
- 3 x mains power adaptors
- 3 x belt clips
- Telephone line cord

BT Freestyle 4500 Quad

- BT Freestyle 4500 base
- 3 x BT Freestyle 4500 chargers
- BT Freestyle 4500 Lounge handset
- 2 x BT Freestyle 4500 Bedroom handsets
- BT BT Freestyle 4500 Kitchen handset
- 8 x NiMH AAA rechargeable batteries
- 4 x mains power adaptors
- 4 x belt clips
- Telephone line cord

Getting started

Location	8
Setting up	8
Attach belt clips (optional)	10

Getting to know your phone

Handset buttons	11
Display icons	12
Navigating the menus	13
Menu map	15
Base	16

Using the phone

Dialling numbers	17
Call timer	17
Auto-answer	17
Backlit display	17
Switch handset on/off	18
Make an external call	18
Preparatory dialling	18
End a call	18
Receiving calls	18
Handsfree	19
Earpiece and handsfree volume	19
Secrecy	20
Redial	20
Paging	22

Keypad lock	23
Internal calls	23

Directory

Entering names	24
Add a new directory entry	25
Dial from the directory	25
View an entry	26
Edit an entry	26
Delete entries	27
Copying directory entries	27
Copy to another handset	28
Set groups	30
Name and set melody for a group	31

Caller Display

Caller Display	32
View / dial a number in the Calls list	33
Save a number to the directory	34
Delete an entry in the Calls list	34
Delete the entire list	34

SMS texting

To subscribe to the SMS text messaging service	35
Cost of the fixed line service	35
Send an SMS text message	36

Entering text	37	Outgoing messages	50
Special characters	38	Answer & Record	50
Writing tips	38	Answer Only	50
SMS template messages	39	Record own outgoing message	50
Edit SMS templates	39	Play outgoing message	51
Delete SMS templates	40	Select answer mode	52
Read, edit and send draft SMS text messages	40	Reinstate pre-recorded outgoing message	52
Read, edit and send messages from your outbox	41	Answer delay	53
Incoming call	42	Audible message alert	54
Reading SMS texts	43	Play, repeat, delete and skip	54
Delete an SMS text message	44	Delete all messages	55
Delete all SMS text messages	44	Record a memo	55
Switch SMS text alert on/off	45	Call screening	56
SMS Service Centre numbers	45	Operating from the base	57
Adding or changing a Send Service number	45	Switch on/off	57
Adding or changing a Receive Service number	46	Adjust loudspeaker volume	57
Selecting a Send Service number	47	Play, repeat, delete and skip	57
		Remote access	58
		Set security PIN	58
		Switch answering machine on remotely	59
Answering machine		Time saver	59
Day, date and time	48	Operating from another phone	60
Operating from a handset	49	Base display	61
Switch on/off	49		

Additional handset settings

Day, date and time	.62
Ringer melody	.63
Ringer volume	.63
Handset name	.63
Adjust contrast	.64
Backlight on/off	.64
Auto answer	.65
Keybeeps on/off	.65
Alarm	.66
Play game	.67
Handset default settings	.68

Connecting to a fax machine	.69
Connecting up	.69

Base settings

Ringer melody	.70
Ringer volume	.70
Handset priority	.70
Dial mode	.70
Recall mode	.72
Base PIN	.72
Base default settings	.73

Additional handsets and bases

Registering new handsets	.74
De-registering a handset	.75
Transferring a call	.75
3-Way calls	.76
Using additional bases	.77
Purchasing additional BT Freestyle 4000 handsets	.78

Help

Replacing handset batteries	.79
Helpline	.86

General information

Safety	.87
Cleaning	.88
Environmental	.88
How many telephones can you have?	.89
Connecting to a switchboard	.90
Access code	.90
Insert a pause	.90
Guarantee	.91
For your records	.92
R&TTE	.93
Declaration of Conformance	.93

Getting started

WARNING

Do not place your BT Freestyle 4500 base in the bathroom or other humid areas.

Handset range

The handset reception range from the base is up to 300m outdoors and up to 50m indoors.

Signal strength

The Υ symbol on your handset screen indicates when you are in range. When you are out of range, it flashes and the screen displays OUT OF RANGE and there is a beep.

IMPORTANT

Do not connect the telephone line until at least one of the handsets is fully charged.

The base station must be plugged into the mains power at all times.

Which socket?



Power socket



Telephone line socket

Location


You need to place your BT Freestyle 4500 base station close enough to a mains power and telephone socket so that the cables will reach.

Make sure it is at least 1 metre away from other electrical appliances to avoid interference.


Your BT Freestyle 4500 works by sending radio signals between the handset and base. The strength of the signal depends on where you site the base. Putting it as high as possible ensures the best signal.

Setting up

1. Plug the power adaptors into the base and any chargers that come with your product.

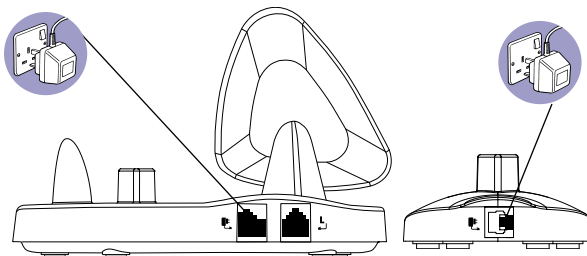


2. Plug the telephone line cord into the base.

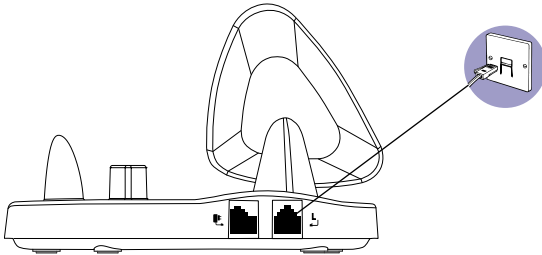

Do **not** connect the other end to the wall socket until at least one handset is fully charged.

3. Plug the power adaptors into the mains wall socket and switch the power on. The green POWER/IN USE light on the base comes on. The display alternates between \square and \square . The answering machine is set to ON.
4. Install 2 X NiMH AAA batteries supplied into each handset. Then slide the battery compartment cover into place.



Talk/Standby time

Under ideal conditions, the handset batteries should give about 12 hours talk time or 120 hours standby on a single charge. (The base must remain plugged into the mains at all times).

Please note that new NiMH batteries do not reach full capacity until they have been run down and recharged a few times.

Battery low warning

When the handset battery symbol is empty and flashing, you will need to recharge the handset battery before using it.

Battery performance

To keep your batteries in the best condition, leave the handset off the base for a few hours at a time (after the initial 16 hour charge).

Running the batteries right down at least once a week will help them last as long as possible.

The charge capacity of rechargeable batteries will reduce with time as they wear out, giving the handset less talk/standby time. Eventually they will need to be replaced. New batteries are available from the BT Freestyle Helpline on 0870 240 3962.


After charging your handset for the first time, subsequent charging time is about 6-8 hours a day. Batteries and handset may become warm during charging. This is normal.

If you remove and replace batteries at anytime, the battery icon in the display will always show that the batteries are empty irrespective of their actual state of charge. After 1 hour on charge the actual battery state will be shown. Alternatively, switch the handset off then on (*see page 18*) and the true battery state will be shown immediately.

5. Charge the handsets for at least 16 hours by placing the handset on the base. The red CHARGING light comes on. The handsets are pre-registered to the base.


If you have purchased either the BT Freestyle Twin, Trio or Quad products the additional handsets will come pre-registered to the base.

6. After 16 hours charging, plug the telephone line cord into the wall socket.

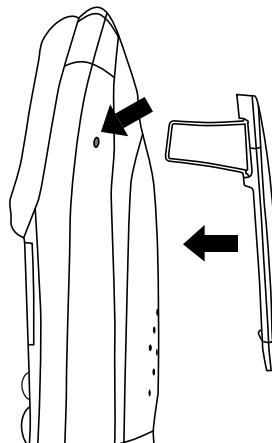
Attach the belt clips (optional)

Getting to know your phone

Handset buttons

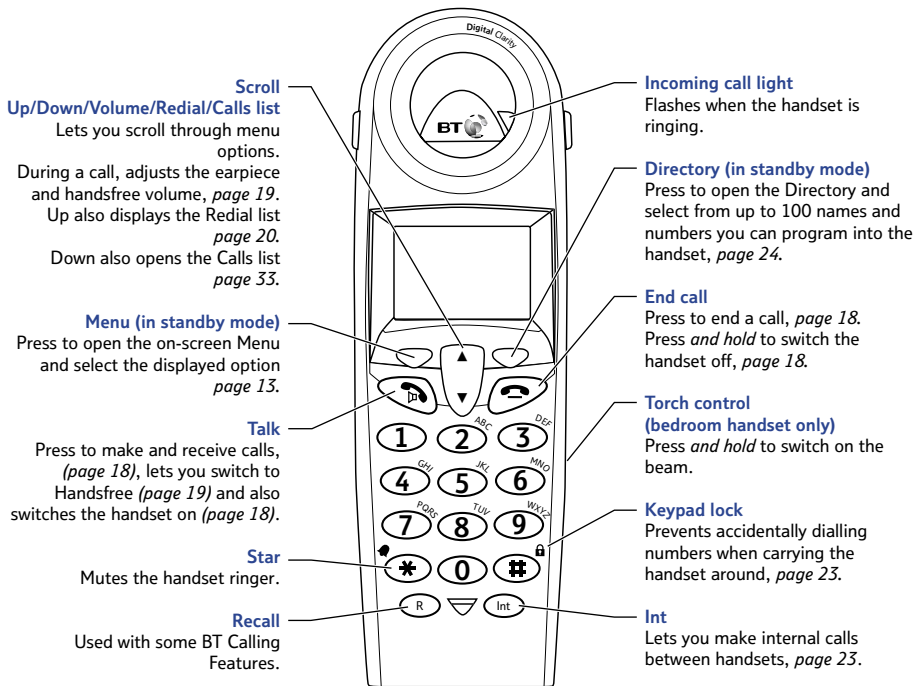

Sample standby screen – This is where the handset icons will appear.

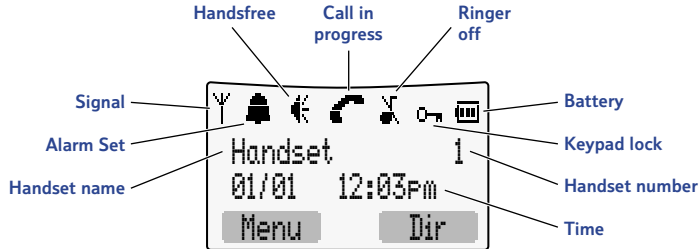

Handset display icons – These are the symbols you will see on your handset's screen.



In range signal

Steady when handset is in range of the base.
Flashes when out of range of the base or not registered to the base.



Alarm set

Indicates that the alarm has been set.



Handsfree on

Indicates that handsfree is being used.



Call in progress

Indicates a call is in progress.



Ringer off

Indicates that the ringer is switched off.



Keypad locked

Indicates when the keylock is on.



Battery status

Indicates when battery is fully charged.



Battery low

Indicates when the battery is low.



You have missed new calls*

Displayed when you have unanswered calls in the Calls list (appears in the third line of the display instead of the time and date).



You have new text messages*

Indicates that you have received a text message (appears in the third line of the display instead of the time and date).




Voice message

Displayed when you have messages stored in the answering machine (appears in the third line of the display instead of the time and date).


* For these features to work you must subscribe to your Network Provider's Caller Display Service.
For SMS to work you must not withhold your telephone number.

Navigating the menus...




Your BT Freestyle 4500 handsets have a menu system which is easy to use. In most cases, each menu leads to a list of options. Have a look at the menu map on the following page.

When the handset is switched on and in standby, press **MENU** to open the main menu and use the  button to scroll to the menu option you want. Press **OK** to open the list of options.

... and selecting menu options

Once the menu list you want is open, use the  button to scroll through the options then press **OK** to select the option you want.

For example to change the handset ringer volume:


1. Press **MENU** to open the main menu then  to display **HANDSET SETTINGS**. Press **OK** then  to display **RINGER VOLUME**.
2. Press **OK**. The volume options are displayed and the current selection is heard. Press  to scroll through the options and each setting is played. Press **SAVE** to confirm the option you want. Display shows **SAVED** and returns to standby.


As you get deeper into the menu you will find that multiple options are shown in the handset display. The highlighted option will be selected when you press **OK**.

Go back one level

You can go back to the previous menu level by pressing **BACK**.

Exit menu

If you want to exit a menu or the phone book, press **BACK**. If you want to go straight to the standby screen press the  button.




Press the **MENU** button to access menus or the **DIR** button to open the directory.

Scroll to display menu options. Then press **OK** to select.

Menu map



Base

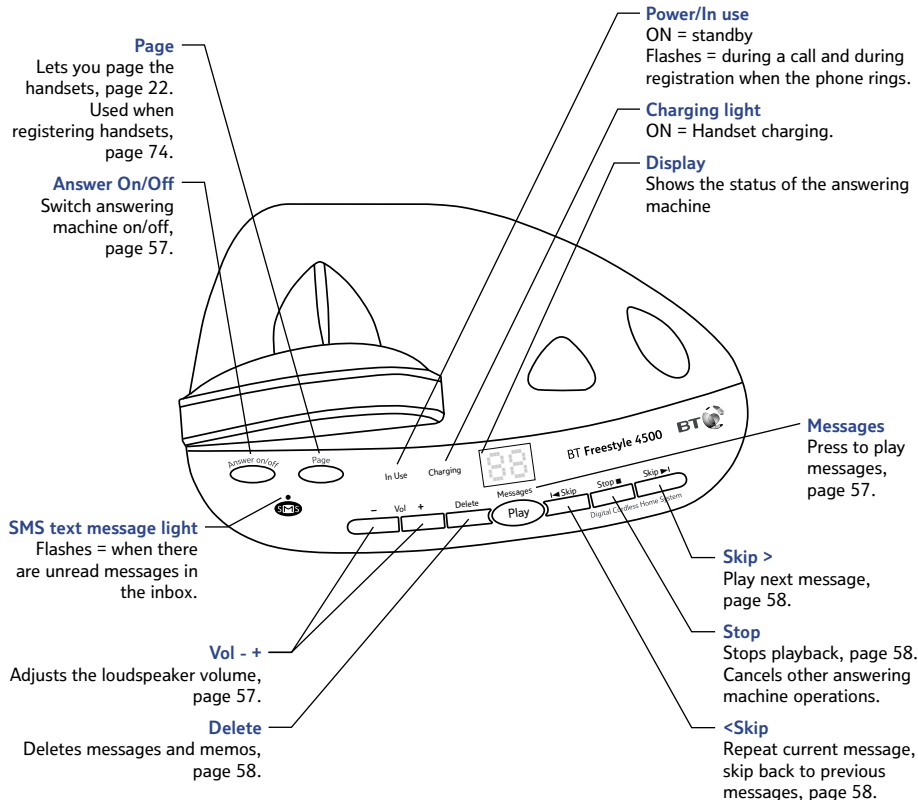


Dialling numbers quickly

Numbers can be dialled direct from the Directory (page 24), the Calls list (page 32) or the redial list (page 20)

Call timer

Your handset automatically times the duration of every call. The time is shown during the call and for a few seconds after the call has ended.

Auto-answer



You can answer a call just by lifting the handset off the base. If you would rather press  to receive a call when the handset is on the base, you need to switch Auto-talk off, page 65.

Backlit display


When you press any button or receive a call/message, the display lights up. If no button is pressed for 10 seconds, the light is switched off.

You can disable the backlight if you wish, see page 64.


Switch handset on/off

1. Press *and hold*  to switch handset off.
2. Press *and release*  to switch it on.


Make an external call

1. Press , listen for the dial tone then dial the number.

Preparatory dialling

1. Enter the number first. If you make a mistake press **CLEAR** to delete. Press  to dial.

End a call

1. Press  or place the handset back on the base.


Receiving calls

When the telephone rings the display may show the number or name of the calling party.

Or show External Call if Caller Display is not subscribed to.

Or Handset X calling if it is an internal call where X is the number of the handset calling.

The handset icon will also flash.





1. Press  to answer the call, or if the handset is on the base or charger, simply lift it up to speak.

If you have subscribed to a Caller Display Service your caller's number (and name if stored in the Directory) will be shown. See page 32 for more information.

Handsfree



Handsfree lets you talk to your caller without holding the handset. It also enables other people in the room to listen to both sides of your conversation.

Switch to handsfree before a call.

1. Press . Display shows  press  *again*. Display shows  and you can hear the dial tone over the handset speaker.

2. Press  to switch handsfree off.

Switch to handsfree during a call.

1. Press . To switch handsfree off, press  *again*.


Earpiece and handsfree volume

You can adjust the earpiece and the handsfree loudspeaker volume.

There are 5 levels to choose from.

Earpiece and handsfree volume are independent of each other but instructions for adjusting are the same for both.

During a call:

1. Use the  button to select volume 1-5. The current setting is shown. When you end the call the setting will remain at the last selected level.

Secrecy



During a call, you can talk to someone nearby without your caller hearing you.

1. During the call press **SECURITY**. Display flashes **Secrecy on**. Your caller cannot hear you.
2. Press **OFF** to return to your caller.





Redial

You can redial up to 20 of the last numbers called. If you have stored a name in the Directory to go with the number, the name will be displayed instead, see page 24.

Redial the last number

1. Press  to open the Redial list. The last number dialled is highlighted. Press  to dial the number.

Redial a number from the list





1. Press  to open the Redial list, the last number called is highlighted. Press  or  to scroll through the list. When the number you want is highlighted, press .

Empty

If there are no numbers in the Redial list, the display shows `Redial List Empty`.

Copy a number from the redial list


You can copy a number from the redial list into the directory. The redial list holds up to 20 of your most recently dialed numbers.

1. Press  to open the redial list. Scroll  or  to the number you want and press **OPTION**.
2. Scroll  to highlight `SAVE NUMBER`. Press **OK**.
3. Display shows `ENTER NAME`. Use the keypad to enter a name (see page 24 for entering text) and press **SAVE**. Display shows `EDIT NUMBER`.
If necessary, use the keypad to change the number, then press **SAVE** to confirm.

If the number is already in the directory the **SAVE** option will not be shown.

Pressing  will stop that handset only.

Deleting a redial entry




1. Press  to open the redial list. Scroll to the entry you want. Press **OPTION**. **DELETE ENTRY** is highlighted. Press **OK**.

Delete entire redial list

1. Press  to open the redial list. Press **OPTION**. **DELETE ENTRY** is highlighted. Press  to highlight **DELETE ALL**. Press **OK**. Press **DELETE** to confirm or **SAVE** to cancel.




Paging

You can alert handset users that they are wanted or locate a missing handset by paging the handsets, (paging calls cannot be answered by a handset).

1. Press  on the base. The handsets ring. Display flashes **PAGING CALL**. Press  *again* to stop the handsets ringing or press  on the handset.

Keypad lock




You can lock the keypad so that you don't dial numbers accidentally while carrying the handset around.

1. Press **and hold** . Display confirms **KEYPAD LOCKED** and then reverts to the standby screen and displays .
2. Press **UNLOCK**, then press  whilst Press **# To Unlock Keys** is shown in the display.


While the keypad is locked you can still answer incoming calls and make **999** or **112** calls to the emergency service. But you cannot call other numbers or use the menus.

Internal calls

You can call the other handsets registered to your BT Freestyle 4500 base.

1. Press , The other handset numbers are displayed. Press  to highlight the handset number you want, then press **OK**.
2. To end the call, press .

If you are making an internal call, and you receive an external call, any handset not in use will ring.

The handsets that are being used will beep in the earpiece. To take the call, press  to finish the internal call then press **TALK** to take the new call.

When there are no entries in the directory the display shows **NEW ENTRY**.

button

When entering text, if you press the **#** button the following characters are available: (space), (.), (,), (#) and (*).

You can store up to 100 names and numbers in the directory of each handset. Each entry contains a name and phone number. Names can be up to 15 characters long and numbers up to 24 digits.

Entering names


1. Use the keypad letters to enter names, e.g. to store TOM:
2. Press **8** once to enter T.
3. Press **6** *three times* to enter O.
4. Press **6** once to enter M.

Writing tips

1. If you make a mistake, press **CLEAR** to delete the last character or digit.
2. Press **0** *once* to insert a space.

Available characters are displayed at the bottom of the screen, keep pressing the button to scroll through the characters.

The cursor automatically moves to the next space after a couple of seconds.

When entering names you can select upper case, lower case or numerics by pressing .




An **A**, **a** or **1** will appear in the display to indicate the current selection.

Add a new directory entry

When the phone is in standby:

1. Press **Dir**. Any entries are displayed in alphabetical order. Press **OPTION**. Display highlights **NEW ENTRY**. Press **OK**. Display shows **ENTER NAME**.
2. Use the keypad to enter a name, then press **SAVE**. Display shows **ENTER NUMBER**.
3. Enter the number you want and press **SAVE**. Display shows **ENTRY SAVED**. You can now add another entry. Or press **BACK** to go back to the previous menu level.

Dial from the directory

1. Press **Dir**. Entries are displayed in alphabetical order.
2. Either scroll  or  through the directory to highlight the entry you want, then press . The number is displayed and dialled.

Or you can search alphabetically by pressing the relevant button, e.g. to find TOM press **8** and scroll through entries under T, then press **TV** to dial.

View an entry

You can display a name and number together.




1. Press **DIR**. Scroll **▲** or **▼** to highlight the entry you want, then press **OPTION**. Scroll **▼** to **SHOW NUMBER** and press **OK**.

Edit an entry

2. Press **DIR**. Scroll **▲** or **▼** to highlight the entry you want, then press **OPTION**. Scroll **▼** to **EDIT ENTRY** and press **OK**.
3. Display shows the name and **EDIT NAME**. Use **CLEAR** and the keypad to change the name then press **SAVE**.
4. Display shows **EDIT NUMBER**. Use **CLEAR** and the keypad to change the number and press **SAVE** to confirm.


Delete entries

You can delete individual entries or the entire directory.

1. Press **DIR**. Scroll  or  to highlight the entry you want, then press **OPTION**. Scroll  to **DELETE ENTRY** or **DELETE ALL** and press **OK**.
2. Display asks you to confirm. Press **DELETE** to confirm or **SAVE** to cancel.

Copying directory entries

Save time adding entries by copying from one handset to another. So you only have to enter names and numbers once!






While copying entries between two handsets if you press the  button copying will be stopped.

When the whole directory is copied, it will overwrite any existing entries on the other handset.




If the directory on the handset you are copying to becomes full, the receiving handset displays **DIRECTORY FULL**. The sending handset displays **COPY DIRECTORY ENTRY FAILED** for 2 seconds.

Copy an entry to another handset

You can copy individual entries or the whole directory from one handset to another providing both handsets are registered to your base.

1. Press **DIR** and then scroll  or  to select the entry you wish to copy. Press **OPTION**. Scroll  to **COPY ENTRY**. Press **OK**.
2. Display shows **COPY TO HANDSET** and the available handset numbers. Press  or  to select the handset you want.
3. Press **OK**. Display shows **COPYING TO HANDSET X**. The receiving handset shows **RECEIVE DIRECTORY ENTRY?** If you press **YES** the entry is copied. If you press **NO** then the copying is aborted. When copying is finished, the display returns to standby.

Copy directory from one handset to another

1. Press **DIR**, then **OPTION**. Scroll  to **COPY DIRECTORY**. Press **OK**.
2. Display shows **COPY TO HANDSET** and the available handset numbers. Press  or  to select the handset you want.

3. Press **OK**. Display shows `COPYING TO HANDSET X`. The receiving handset shows `RECEIVE DIRECTORY?` If you press **YES** the directory is copied. If you press **NO** then the copying is aborted. When copying is finished, the display returns to standby.

Incoming call while copying

An incoming call cancels copying. If you're copying the whole directory, any entries transferred before a call interrupts will be stored.

If the other handset is in use





Your handset's display shows `NOT AVAILABLE` when you select a copy option before returning to standby.

If any handset is in use you cannot use the copy function.

Set groups







You can create ringing groups by selecting entries from your directory. For example if you create a group for family members and assign a ringer melody to that group when one of that family group calls you will be able to identify which group from the ringer melody.

You can create up to 3 groups.

1. Press **DIR**. Scroll  or  to highlight the entry you want to store in a group. Press **OPTION**.
2. Scroll  to **SET CALL GROUP** and press **OK**.
Scroll  to highlight the group you want.
Press **OK**. The display shows **ADDED TO GROUP X**.
Select **NO GROUP** to remove a name from a group.

Name and set melody for a group

You can rename a group and change the melody.

1. Press **MENU** then  to display **HANDSET SETTINGS**. Press **OK**.
2. Scroll  to **CALL GROUPS** and press **OK**. Press  or  to highlight the group you want and press **OK**.
3. If required, use  or  to select **SET MELODY** (see page 66 for selecting melody options) or **EDIT GROUP NAME**. Press **OK**.
4. Press **CLEAR** to delete the existing name then enter the new name and press **SAVE**.
5. Press **BACK** to return to standby.

Caller Display

IMPORTANT

To use Caller Display you must first subscribe to your network provider's Caller Display service. A quarterly fee is payable.

For more information on BT's Calling Features, call BT free on 0800 800 150.

Caller information not available

With some incoming calls, the telephone number of the caller is not available and cannot therefore be displayed.

In this case your BT Freestyle 4500 provides you with some explanatory information:

UNAVAILABLE – The number is unavailable.

WITHHELD – The caller has withheld their number.

RINGBACK – Ringback call.

OPERATOR – The call has been made via the operator.

PAYPHONE – The caller is ringing from a payphone.

INTERNATIONAL – International call.

Using Caller Display

If you subscribe to a Caller Display service, you can see your caller's number (provided it is not withheld) on your handset display before you answer the call.

When a call is received your caller's telephone number will be stored in a Calls list. The Calls list holds up to 40 calls. When the Calls list is full, the oldest call will be replaced by a new call, but the latest call will always be at the top of the list.


Each call is numbered:


01 = the oldest call in the Calls list. So in a full Calls list, 40 would be the most recent call.

Ringback calls will display the number dialled when you requested the ringback service.

Sample Calls list screen



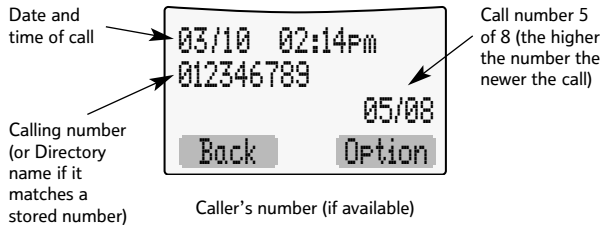

Missed = call information has not been viewed before



If you have any unanswered calls in the list a  icon will be shown on the handset display.

The icon will disappear when you have viewed the missed calls in the Calls list.

To view / dial a number the Calls list

1. Press  to open the Calls list. Details of your most recent call are displayed.
2. Scroll  or  through the list. Press  to dial the number displayed.

Save a Calls list number to the directory

1. Press **▼**. If necessary, scroll **▲** or **▼** to the entry you want.
2. Press **OPTION**. Display highlights **SAVE NUMBER**. Press **OK**.
3. Use the keypad to enter a name. Press **SAVE**. If necessary use the keypad to change the number. Press **OK**. Display shows **ENTRY SAVED**.

Delete an entry in the Calls list

1. Press **▼**. If necessary, scroll **▲** or **▼** to the entry you want.
2. Press **OPTION**. Display highlights **DELETE CALL**. Press **OK**.

Delete the entire Calls list

1. Press **▼**. Press **OPTION**. Scroll **▼** to highlight **DELETE ALL**. Press **OK**.
2. Press **DELETE** to confirm or **SAVE** to cancel.

Welcome to the BT Text Service on your BT Freestyle 4500. The SMS Service is provided by BT.

Your BT Freestyle 4500 can send and receive messages to any mobile phone from participating mobile networks and compatible landline telephones in the UK.

The fixed line SMS service is provided under BT's terms and conditions for telephone service. These can be found by visiting the BT.com website at:
<http://www.bt.com/terms/tor.htm>

To subscribe to the SMS text messaging service

When you send your first SMS text message from your BT Freestyle 4500 you will automatically be registered for the service.

On receipt of your first SMS through the service, the system will send you a welcome SMS message back.

You may also register by sending the word Register to 00000 upon which you will receive a confirmation message.

Cost of the fixed line service

There is no subscription charge (other than the subscription to Caller Display). Visit the BT.com website (www.bt.com) to find out how much it costs to send a text message (depends upon your call package).

SMS stands for Short Messaging Service.

IMPORTANT

You must subscribe to your Network Provider's Caller Display Service so that you can use SMS text messaging. A quarterly fee may be payable, please contact your network provider for more details.

When you are using SMS text messaging you must not withhold your telephone number or the service will not allow you to connect.



You may also send messages to landline phones that are NOT SMS compatible. Messages to non-compatible lines will be connected to voice text and delivered in spoken words to the telephone as a call. Please note that the conversion can translate common abbreviations and smileys etc, but to ensure maximum clarity of message delivery, abbreviations etc should be used sparingly.

Some other network provider lines may not be compatible with this SMS service.

You can send and receive SMS text messages of up to 160 characters.

If your BT Freestyle 4500 is connected to a switchboard, you may not be able to use text message services.

Send an SMS text message

1. Press **MENU**, then **OK** *twice*.
2. Use the keypad to write your message then press **OPTION**.
3. You can now scroll  or  to chose between:
 - SEND TO** – press **OK** and either enter the number you want or press **SEARCH** to display your Directory then scroll to the entry you want. Now press **SEND**.
 - SAVE** – you can save a text in the Draft Messages box for sending later. Press **OK** to save.
 - USE TEMPLATE** – these are pre-stored messages. Press **OK** and scroll to the message you want and press **OK**. The template message is added to your text at the cursor. When ready, press **OPTION**. These three choices are displayed again.
4. When sending a message the display briefly shows **TRANSFERRING SMS** before returning to standby.
 - If there is a problem, the display shows **MESSAGE FAILED** and the message is stored in the outbox. Press **CLEAR** to return to the standby display or press **READ** to open the message and send again.

Sent messages are stored in the Outbox

Your BT Freestyle 4500's outbox is like a redial list. It holds a copy of the last 5 messages sent. If your message did not get through, a copy is stored in the outbox so you can send it later. The newest messages replace the oldest messages in the outbox.

When the outbox is full the newest messages replace the oldest messages in the outbox.

Saved messages are stored in the Drafts folder

If you want to save a message to complete and/or send later you can store it in the drafts folder. Your BT Freestyle 4500's drafts folder can store up to 5 messages.

Entering text

1. Use the keypad letters to write, e.g. to write TOM:
2. Press **8** once to enter T.
3. Press **6** three times to enter O.
4. Press **6** once to enter M.

All handsets use the same inbox, outbox and drafts folder.

Special characters

When writing texts the **1** and **0** button let you add punctuation.

1	.	,	'	?	!	"	1	-	()	@	/	:	;
0	space	0	+	&	_	\$	£	€	¥	<	>	=	#	*
#	space	.	,	#	*									

Writing tips

If you make a mistake, press **CLEAR** to delete the last character or digit to the left of the cursor.

1. Press **0** to insert a space.
2. Press **▲** to move the cursor left.
3. Press **▼** to move the cursor right.
4. Press ***#** to change between upper, lower case and numeric characters.

Available characters are displayed at the bottom of the screen, keep pressing the button to scroll through the characters.

The cursor automatically moves to the next space after a couple of seconds.

SMS template messages

Use a template to add pre-set statements to make your texts easier to write.

The templates are:

- Please call
- I'll be back at
- HAPPY Birthday

There is one spare template shown as EMPTY for you to write your own message. You can also change or delete the pre-set ones.

Edit SMS templates



You can overwrite the existing templates with your own messages.

1. Press **MENU** then **OK** and scroll ▼ to **TEMPLATE** and press **OK**. The available templates are displayed. Scroll to the template you want and press **OK**.
2. Display highlights **EDIT TEMPLATE**. Press **OK** and write your own template. Use **CLEAR** to delete any existing text you don't want, then press **SAVE**. You can now insert the new template into any text message.

When you delete a template it is shown in the display as **EMPTY**.




If you are editing a message which has already been assigned a number you will be asked if you want to edit the number already entered.

Delete SMS templates

1. Press **MENU** then **OK** and scroll  to **TEMPLATE** and press **OK**. The available templates are displayed. Scroll to the template you want and press **OK**.
2. Press  to highlight **DELETE TEMPLATE** and press **OK**. Press **DELETE** to confirm or **SAVE** to cancel.

Read, edit and send draft SMS text messages

If you have saved a message you have written for sending later, you can view, edit and send it from the Draft Messages box.

1. Press **MENU**, then **OK**. Scroll  to **DRAFTS** and press **OK**. The date and time of the latest draft message is displayed. Press **READ**.
2. The message is displayed. Press **OPTION**.
3. You can now scroll  or  to choose between:

SEND TO – press **OK** and either enter the number you want or press **SEARCH** to display your Directory then scroll to the entry you want. Now press **SEND**.

SAVE – you can save it again to send later.
Press **OK** to save.

USE TEMPLATE – these are pre-stored messages.






Press **OK** and scroll to the message you want and press **OK**. The template message is added to your text. When ready, press **OPTION**. These three choices are displayed again.

DELETE – deletes current message.

DELETE ALL – deletes all messages in the Draft messages box.

Read, edit and send messages from your outbox

You can check on the last 5 messages you have sent. Your outbox will also store messages that did not get through, giving you a chance to send them again later. The oldest stored message is automatically replaced with the newest.

1. Press **MENU** then **OK**. Scroll  to **OUTBOX** and press **OK**. The display indicates messages **NOT SENT** if the message previously failed or **SENT** if the message was sent successfully.
2. Scroll  or  to the message you want and press **READ**. Press **OPTION**.
3. You can now scroll  or  to choose between:
 - SEND TO** – press **OK** and either enter the number you want or press **SEARCH** to display your Directory the scroll to the entry you want. Now press **SEND**.

SAVE – you can save a text in the Draft Messages box for sending later. Press **OK** to save.

USE TEMPLATE – these are pre-stored messages. Press **OK** and scroll to the message you want and press **OK**. The template message is added to your text. When ready, press **OPTION**. These three choices are displayed again.

USE NUMBER – ring the sender's number.


DELETE – deletes current message.






DELETE ALL – deletes all messages in the Outbox.

Incoming call

If you are writing a text message and receive a call, your handset will let you answer the call. When your conversation is finished, the display shows **CONTINUE WRITING SMS MESSAGE?**. Press **YES** to continue where you left off or **NO** to delete your message.

Reading SMS texts

When you receive a new text message, the display shows **NEW SMS MESSAGE**. To read it later, press **CLEAR**. The display returns to standby and shows  instead of the date and time.

1. Press **MENU**. Display shows **SMS TEXT MESSAGING**. Press **OK**.
2. Scroll  to **INBOX** then press **OK**. Now scroll  or  to the message you want. Press **READ**.
3. Scroll  or  to read through the message.


If you have no messages in your delete text inbox, the handset display shows **NO MESSAGES**.

You can now press **OPTION** and scroll to:

DELETE – deletes current message.

REPLY – write a reply to the message.

FORWARD – forward the message to another number.

USE NUMBER – press the  button to ring the sender's number.

SAVE NUMBER – save number to the directory (if the number is already stored, this is not displayed).

DELETE ALL – delete all messages in the Inbox.

You will not be able to receive text messages until you have first sent a message. The first sent message registers you with the text service.


All handsets use the same inbox, outbox and drafts folder.

4. Follow the on screen prompts to save, write, send or delete the messages. Or press **BACK** to go back to the previous menu level.


Received messages are stored in the Inbox

Your BT Freestyle 4500's inbox can store up to 40 received text messages. The oldest message is listed as 01. 40 would be the most recent message. The inbox is in the base not the handset.

Delete an SMS text message

1. Press **MENU** then **OK**. Scroll to either **INBOX**, **DRAFTS** or **OUTBOX** and press **OK**.
2. If necessary, scroll to the message you want then press **READ** to display the message then **OPTION**. Scroll  to **DELETE** and press **OK**. Confirm by pressing **DELETE**.

Delete all SMS text messages in a box

1. Press **MENU** then **OK**. Scroll to either **INBOX**, **DRAFTS** or **OUTBOX** and press **OK**.
2. Press **READ** then **OPTION**. Scroll  to **DELETE ALL** and press **OK**. Confirm by pressing **DELETE**.

Switch SMS text alert on/off

1. Press **MENU** then **OK**. Scroll **▼** to **SMS** settings and press **OK**.
2. Scroll **▼** to **SMS ALERT ON/OFF** and press **OK**.
A **✓** indicates the current setting. Press **▲** or **▼** to highlight **ON** or **OFF** then press **OK**.

SMS Service Centre numbers

To send and receive SMS text messages you need the telephone number of your Network's SMS Centre.

If you accidentally delete the **SEND** or **RECEIVE SMS Service Centre** numbers you will need to re-enter them in order for your SMS Service to work.

The **SEND SMS Service** number is: **1470P17094009**.



The **RECEIVE SMS Service** number is: **0800587529**.

Adding or changing a Send Service number

1. Press **MENU** then **OK**. Scroll **▼** to **SMS SETTINGS** and press **OK**. Display shows **SELECT SMS SEND SERVICE CENTRE**.
2. *Either* press **▲** or **▼** to display **SMS SENDING SERVICE CENTRES**. Press **OK**.






When you enter a new number it must be prefixed by **1470P** (P=Pause, press *and hold* the **0** button to enter a pause).

Example, if the new number is 0123456789, then you should enter 1470P0123456789.

3. Scroll  or  to highlight the option you want and press **OK**. The pre-set number (1470P17094009) is stored under Send 1.
4. You can now enter a new number or edit an existing number. Press **SAVE**.

Adding or changing a Receive Service number

You can store up to 3 numbers of SMS Service Centres that you receive messages from. You need to have these numbers stored in your BT Freestyle 4500 so that it can recognise that an incoming call is a text message (otherwise it will ring and the message will not be received). SMS Receive 1 is pre-set to the BT number (0800587529). You can add two others and edit all numbers.

1. Press **MENU** then **OK**. Scroll  to SMS SETTINGS and press **OK**. Display shows SELECT SMS SEND SERVICE CENTRE.
2. *Either* press  or  to display SMS RECEIVING SERVICE CENTRES. Press **OK**.
3. The pre-set number is stored under SMS Receive 1. Scroll  or  to highlight the option you want and press **OK**.





4. You can now enter a new number or edit an existing number. Press **SAVE**.

In some cases the numbers for the provider's SMS transmission and reception centre will be the same.

Selecting a Send Service number

If you have two Service Centre numbers stored you can choose which one you use to send a message.

Your BT Freestyle 4500 is pre-set to send using **Send 1**.

1. Press **MENU** then **OK**. Scroll  to SMS SETTINGS and press **OK**. Display shows SELECT SMS SEND SERVICE CENTRE.
2. Press **OK**. A  indicates the current provider.
3. Scroll  or  to highlight the provider you want and press **OK**.
4. Any messages sent will go via the selected provider.

Answering machine

If you subscribe to your network provider's Caller Display service, the date and time are set automatically when your BT Freestyle 4500 receives its first call, but you will also need to set the day using a handset.

You can operate your BT Freestyle 4500 answering machine from:

- the base
- the handset
- Remotely from any external Touchtone™ telephone.

The factory setting for the answering machine is ON.

Until you change your outgoing message, your callers will be greeted with the pre-recorded message *'Hello, your call cannot be taken at the moment, so please leave your message after the tone'*.

Day, date and time

An announcement of day, date and time of recording will be added automatically to each message and memo. If you do not set the day **and** the date and time the base display will flash CL to remind you that it has not been set. The date and time is also displayed on each handset. The day, date and time are set using a handset.

Setting day, date and time using a handset

1. Press **MENU**. Scroll to TIME AND DATE SETTINGS and press **OK**. Display shows SET DATE & TIME. Press **OK**.

2. Use the keypad to enter the date, e.g. **0 3 0 6** = 3rd June. Press **Save**.
3. Enter the time e.g. **1 5 3 0** = 3.30pm. Press **Save**.
4. Press **▼**, display shows Set Day. Press **OK**.
5. Scroll **▲** or **▼** until the current day is highlighted then press **Save**.

The new time will not appear on the other handsets until they go on-line or a call is received.

Operating the answering machine from a handset

You can use any registered BT Freestyle 4500 handset to switch your answering machine on and off, hear your messages and adjust the answering machine settings.

Switch on/off

1. On the handset, press **MENU**, scroll **▼** to **ANSWER MACHINE** and press **OK**.
2. Scroll **▲** or **▼** to **ANSWER ON/OFF** and press **OK**. Press **▲** or **▼** to highlight the setting you want. The current setting is ticked. Press **OK**.

Outgoing messages

This is the message your caller hears when the answering machine picks up their call. Your BT Freestyle 4500 comes with two pre-recorded outgoing messages to choose from.

Answer & Record

This allows your caller to leave a message for you.

The pre-recorded message is “Hello, your call cannot be taken at the moment, so please leave your message after the tone.”

Answer Only

This does not allow your caller to leave a message.






The pre-recorded message is “Hello, your call cannot be taken at the moment, and you cannot leave a message, so please call later.”

Record your own outgoing message







Your message can be up to 2 minutes long. It replaces the pre-recorded outgoing message, but you can reinstate this at any time.

During operation via the handset, you will hear prompts that guide you through each step.

During recording, rÅ flashes on the base display.





1. On the handset, press **MENU**, scroll  to **ANSWER MACHINE** and press **OK**.
2. Scroll  to **ANSWER SETTINGS** and press **OK**. Scroll  to **OUTGOING MESSAGE**. Press **OK**. Display shows **RECORD OUTGOING MESSAGE**. Press **OK**.
3. Press  or  to select **ANSWER & RECORD** or **ANSWER ONLY**. Press **OK**. Display shows **RECORDING**.
4. Speak your message after the announcement. Press **SAVE** to end recording. Your message is played back. Press **OK** to stop the playback.

Play outgoing message

1. On the handset, press **MENU**, scroll  to **ANSWER MACHINE** and press **OK**.
2. Scroll  to **ANSWER SETTINGS** and press **OK**. Scroll  to **OUTGOING MESSAGE**. Press **OK**. Scroll  to **PLAY OUTGOING MESSAGE**. Press **OK**.
3. Press  or  to select **ANSWER & RECORD** or **ANSWER ONLY**. Press **OK**. Display shows **PLAYING** and your message is played.
4. Press **OK** to hear it again or **BACK** to return to the previous level.





Select answer mode



Set your answering machine to Answer & Record or Answer Only.

1. On the handset, press **MENU**, scroll  to **ANSWER MACHINE** and press **OK**.
2. Scroll  to **ANSWER SETTINGS** and press **OK**. Display shows **ANSWER MODE**. Press **OK**.
3. Press  or  to highlight the setting you want - **ANSWER & RECORD** or **ANSWER ONLY**. The current setting is ticked.
4. Press **SAVE** to choose the highlighted setting or **BACK** to return to the previous level.

Reinstate a pre-recorded outgoing message

This means deleting your own recorded outgoing message.

1. On the handset, press **MENU**, scroll  to **ANSWER MACHINE** and press **OK**.
2. Scroll  to **ANSWER SETTINGS** and press **OK**. Scroll  to **OUTGOING MESSAGE**. Press **OK**. Scroll  to **PLAY OUTGOING MESSAGE** and press **OK**.




3. Press  or  to select ANSWER & RECORD or ANSWER ONLY. Press **OK**. Display shows PLAYING.
4. Whilst the display shows PLAYING, press **DELETE**.
The pre-recorded message is reinstated and played.

Answer delay



Answer delay sets the number of times your BT Freestyle 4500 will ring before the answering machine picks up your call. The default setting is 6 rings. You can change this setting to 2, 4, 6, 8 rings or time saver.

Time Saver can save you the cost of a call when you want to ring in to find out if you have new messages. If your answering machine answers after 2 rings, you have new messages. If you have no new messages it will answer after 6 rings. So if you hear a third ring, you can hang up before you are connected, saving you the cost of a call.

Check and set answer delay






1. On the handset, press **MENU**, scroll  to ANSWER MACHINE and press **OK**.
2. Scroll  to ANSWER SETTINGS and press **OK**. Scroll  to ANSWER DELAY. Press **OK**.

When you have messages stored on your answering machine, the handset screen displays .

3. Press  or  to highlight the option you want. The current setting is ticked.
4. Press **SAVE** to confirm or **BACK** to return to the previous level.

Audible message alert

When this feature is switched On, your BT Freestyle 4500 will beep every 10 seconds to indicate new messages. The default setting is Off.

1. On the handset, press **MENU**, scroll  to **ANSWER MACHINE** and press **OK**.
2. Scroll  to **ANSWER SETTINGS** and press **OK**. Scroll  to **MESSAGE ALERT**. Press **OK**.
3. Press  or  to highlight the setting you want. The current setting is ticked.
4. Press **SAVE** to choose the highlighted setting or **BACK** to return to the previous level.

Play, repeat, delete and skip

1. On the handset, press **MENU**, scroll  to **ANSWER MACHINE** and press **OK**.

2. Display shows **PLAY MESSAGES**. Press **OK**. Your messages are played. Screen shows details of the message being played. You can now press:

- 4 or **PREV** *once* to replay the current message or *twice* to hear the previous message.
- 6 or **NEXT** to hear the next message.
- 5 to delete the message being played.

Delete all messages

1. On the handset, press **MENU**, scroll ▼ to **ANSWER MACHINE** and press **OK**.
2. Scroll ▼ to **DELETE ALL MESSAGES**. Press **OK**. Press **DELETE** to confirm or **SAVE** then **BACK** to cancel.

Record a memo

You can record a message for other users. It is played back just like a normal message.

1. On the handset, press **MENU**, scroll ▼ to **ANSWER MACHINE** and press **OK**.
2. Scroll ▼ to **RECORD MEMO**. Press **OK** and speak your memo message. Press **SAVE** to end recording.

A message marked **NEW** has not been played back before.

A message marked **OLD** has already been played back.


Memos can be any length up to the available recording capacity (max. 15 minutes). Memos are stored in the same way as incoming messages and the message counter on the base will increase by 1.

3. Press **OK** to record another memo or **BACK** to return to standby.



Call screening

You can listen while your answering machine takes a call via the handset or the base speaker. This lets you identify the caller and decide whether to take the call yourself.

Call screening using a handset

1. When the answering machine takes a call, press **SCREEN** to hear your caller leaving their message. If you want to talk to your caller, press . Recording stops automatically.

Call screening at the base

1. When the answering machine takes a call press  to set the required volume so that you can hear your caller leaving their message. If you want to talk to your caller, press  on a handset. Recording stops automatically. You can also adjust the speaker volume when the machine is idle, the current setting is shown in the display. To switch call screening off set the volume to 00.

Using the answering machine at the base



Switch on/off

1. Press . The machine announces On or Off.



Adjust loudspeaker volume

Volume for message playback ranges from 01-05 and call screening ranges from 00-05. 00 = Off and 05 = Maximum.

1. Message Playback

During message playback on the base, press  or  to set the desired volume.

2. Call screening

Whilst the machine is idle or whilst a message is being recorded, press  or . When the highest or lowest level is reached you hear two beeps.

Play, repeat, delete and skip


The display shows the total number of messages and memos recorded.

1. Press **MESSAGES**. The machine announces the number of messages and whether they are new or old.


You can keep a note of your Remote Access PIN by writing it in the space provided on page 92.


The messages are played, starting with the first message received. New messages are always played first.

During playback, press:

 to delete the current message.

 **twice** to delete all messages.

 once to repeat the current message, **twice** to play the previous message.

 to play the next message.

 to stop playback.

Remote access

Set security PIN

You can operate your answering machine from any modern phone by calling your BT Freestyle 4500 and entering a 4-digit security code.

The pre-set code is 0000. You can change this to help prevent unauthorised callers from listening to your messages.

1. On the handset, press **MENU**, scroll  to **ANSWER MACHINE** and press **OK**.

2. Scroll ▼ to ANSWER SETTINGS and press OK. Scroll ▼ to REMOTE ACCESS PIN. Press OK.
3. Enter the current PIN (original setting 0000). Press OK.
4. Enter the new PIN, press OK. Enter it again and press OK to confirm. The new PIN is saved.
5. Press BACK to return to standby.

Switch answering machine on remotely

If you forget to switch on your answering machine, you can do it from another phone.

1. Dial your phone number and let it ring. After 20 rings, your answering machine will switch on.

Time saver

If you have set the answer delay to Time Saver, your answering machine will answer after 2 rings if you have new messages. If you do not have new messages it will not answer until 6 rings. This enables you to hang up before you are connected, saving you the cost of a call. To set the answer delay, see page 53.

If you enter your security code incorrectly, after the second attempt, your BT Freestyle 4500 will announce: "Thank you for calling" and will hang up.

Operate your answering machine from another phone

1. Dial your phone number. When you hear your outgoing message, press *****. You will hear “Please enter your security code”.
2. Enter your 4-digit code. If you have new messages, your machine announces “You have (n) new messages”, and they are played. Or you will hear “You have no new messages, to hear main menu, press 1.”

Use the buttons on the keypad to operate your answering machine:

- 1** hear the main menu
 - 2** play all messages
 - 3** play new messages
 - 4** once to repeat the message or twice to play the previous message
 - 5** delete the message being played
 - 6** skip forward to the next message
 - 7** set answer mode
 - 8** play your outgoing message
 - 9** record a new outgoing message
 - 0** switch answering machine off/on.
3. If you don't give any instructions for 8 seconds, your BT Freestyle 4500 will hang up.

Base display

Display	Meaning
(BLANK)	Power off.
- -	Power on, answering machine off.
00-XX	Answer machine ON, number of messages stored.
01-XX (flashing)	Answer machine ON, number of messages stored and at least one new message.
01-XX alternating with A0	Answer machine ON, number of messages stored and set to Answer Only mode.
rA (flashing)	Answering machine being accessed by a handset or another telephone.
F (flashing)	Memory full.
CL (flashing)	Date, day and time not set.

Additional handset settings

If you do not set the date, time and day the base display will continually flash CL.

Day, date and time

If you subscribe to your network's Caller Display service, the date and time are set automatically on all handsets when your BT Freestyle 4500 receives its first call. If new handsets are then registered to the base, they will also receive the current date or time. However, to enable the answer machine to 'date stamp' your messages, you also have to set the day. The day has to be set manually using a handset. The date and time can also be set manually using a handset. If the mains power to the base is cut, the day, date and time are lost and will need to be reset.






Setting day, date and time using a handset

1. Press **MENU**. Scroll **▼** to TIME AND DATE SETTINGS and press **OK**. Display shows SET DATE & TIME. Press **OK**.
2. Use the keypad to enter the date, e.g. **0 3 0 6** = 3rd June. Press **SAVE**.
3. Enter the time e.g. **1 5 3 0** = 3.30pm. Press **SAVE**.
4. Press **▼**, display shows SET DAY. Press **OK**.
5. Scroll **▼** until the current day is highlighted then press **SAVE**.

The new time will not appear on the other handsets until they go on line or a call is received.





Ringer melody

You can set your handset to different ringer melodies for External and Internal calls. Choose from 5 standard ringer melodies and 6 polyphonic melodies.

1. Press **MENU**. Scroll  to **HANDSET SETTINGS**. Press **OK**. Display shows **RINGER MELODY**.
2. Press **OK**. If required scroll  or  to select **INTERNAL** or **EXTERNAL**. Press **OK**. The current melody is displayed and played.
3. Scroll  or  to the melody you want and press **SAVE**.

Ringer volume



You can choose between 5 volume levels and Off.

1. Press **MENU**. Scroll  to **HANDSET SETTINGS**. Press **OK**. Scroll  to **RINGER VOLUME**.
2. Press **OK**. Scroll  or  to select the volume level, which is played. Press **SAVE**.





Handset name

You can give each handset a name up to a maximum of 12 characters, for example “kitchen”. It will still display its handset number.

If you use the **CLEAR** button to delete a handset name then press **SAVE** the handset will return to its original name, e.g. **Handset 1**.






1. Press **MENU**. Scroll  to **HANDSET SETTINGS**. Press **OK**. Scroll  to **NAME HANDSET**.
2. Press **OK**. Use **CLEAR** and the keypad to enter the name you want then press **SAVE**.

Adjust contrast


1. Press **MENU** then scroll  to **HANDSET SETTINGS** and press **OK**.
2. Scroll  to **DISPLAY CONTRAST** and press **OK**.
3. Select the contrast setting by scrolling  or  through the 8 levels displayed. Press **SAVE** to select the setting you want.





Switch backlight on or off

The handset display is backlit on all three handset options. You can choose whether you want the backlighting on or off.





1. Press **MENU** then scroll  to **HANDSET SETTINGS** and press **OK**.
2. Scroll  to **BACKLIGHT ON/OFF** and press **OK**.
3. The current setting is indicated by a . Press  or  to highlight the setting you want and press **SAVE**.

Auto Answer

When you receive a call, you can answer it by lifting the handset off the base station, this is called auto answer. When you switch auto answer off, all calls must be answered by pressing .

1. Press **MENU**. Scroll  to **HANDSET SETTINGS**. Press **OK**. Scroll  to **AUTO TALK ON/OFF**.
2. Press **OK**. Press  or  to select **ON** or **OFF** then press **OK**.

Keybeeps on/off

1. Press **MENU**. Scroll  to **HANDSET SETTINGS**. Press **OK**. Scroll  to **KEY BEEPS ON/OFF**.
2. Press **OK**. Press  or  to select **ON** or **OFF** then press **OK**.










If the keybeeps are set to ON, the handset will emit a beep whenever a button is pressed.

Alarm setting will only affect the handset it was set on.

Alarm






You can set a BT Freestyle 4500 handset to give an alarm ring.

Switch alarm on or off

1. Press **MENU** then scroll  to **TIME & DATE SETTINGS** and press **OK**.
2. Scroll  to **ALARM** and press **OK**. Display shows **ALARM ON/OFF**. Press **OK**.
3. The current setting is indicated by a . Press  or  to highlight the setting you want and press **OK**.
4. If you press **ON**, you can now enter the time at which you want your phone to ring using the 24 hour clock e.g.     for 7.30pm and press **SAVE**.

When the alarm is set a bell icon is shown in the handset display. To silence the alarm press any key. The alarm will sound daily until you switch it off via the Time Settings menu.




Setting melody for the alarm

1. Press **MENU** then scroll  to **TIME & DATE SETTINGS** and press **OK**.
2. Scroll  to **ALARM** and press **OK**. Display shows **ALARM ON/OFF**.
3. Scroll  to **SET MELODY** and press **OK**. The current melody is displayed and played.
4. Scroll  or  to the melody you want and press **SAVE**.

Play game

To play 'Adder'

The object of the game is to make the Adder snake longer by directing it to the food.

1. Press **MENU** then  to display **GAME**, press **OK**. Display shows **ADDER GAME**. Press **OK**.
2. Press  or  to select between **NEW** or **CONTINUOUS** (if you want to carry on your last game).


If you choose **NEW** or if you do not have an unfinished game stored, the display will show the 4 available proficiency levels. Choose the level you want (1 = easy).


The default melody for the alarm is Beeps.


Saving a game


If you exit a game before it is finished by choice, the handset rings or paging occurs, the current game will be automatically saved. The saved status can be kept until the handset is switched off.


3. Controls:

 = right

 = left

 = up

 = down

 – return to standby screen.

DIR – pause and see score.

MENU – exit game or resume game by pressing **BACK**.

Handset default settings


Settings	Options	Default setting
Ringer melodies	11 ringtones – 6 polyphonic and 5 standard	Melody 1 (standard)
External		
Internal		Melody 2 (standard)
Handset ringer volume (both)	5 levels and off	5
Earpiece volume	5 levels	3
Auto answer	On/Off	On
Display contrast	8 levels	5
Backlight	On/Off	On
Key Beeps	On/Off	On

Connecting to a fax machine

Most fax machines and modems are designed to work with answering machines so that you can receive both fax and voice messages.

Connecting up

Connect your BT Freestyle 4500 telephone line cord to the fax machine. This is most likely to be on the back of the fax machine's telephone line cord socket or there may be a separate socket at the side or back of the fax.

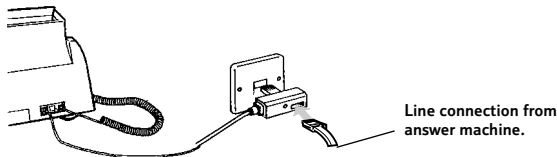

1. Set your fax machine reception mode to TAD/FAX. (See your Fax user guide for instructions).

Make sure the answer delay (i.e. the number of rings before your answering machine picks up a call) is always less on the answering machine than the fax machine/fax modem. This means your answering machine will always pick up the call first and switch it to the fax machine if it hears the fax tones. We recommend you set your BT Freestyle 4500 to answer calls after 2 or 4 rings. To change the answer delay, see page 53.




IMPORTANT

Make sure your fax machine is compatible for use with an answering machine. See your fax machine's user guide for details.

Base settings





Ringer melody

You can set your base to play one of 5 different ringer melodies.

1. Press **MENU**. Scroll  to **BASE SETTINGS**. Press **OK**. Display shows **RINGER MELODY**.
2. Press **OK**. Scroll  or  to the melody you want and press **SAVE**.


Ringer volume




You can choose between 5 volume levels and Off.

1. Press **MENU**. Scroll  to **BASE SETTINGS**. Press **OK**. Scroll  to **RINGER VOLUME**.
2. Press **OK**. Scroll  or  to select the volume level which is played. Press **SAVE**.





Handset priority

Your BT Freestyle 4500 is preset so that when you receive an incoming call, all handsets will ring. You can change this so that one handset will ring 2, 4, 6, or 8 times before the others.

1. Press **MENU**. Scroll  to display **BASE SETTINGS** and press **OK**.





2. Scroll  to **HANDSET PRIORITY** and press **OK**.
Use  and  to select between:


ALL HANDSETS – all handsets ring together.
Press **OK** confirm.

SELECTED HANDSET – one handset rings before the others. Display shows **SELECT HANDSET** and the handset numbers. Use  and  to select the handset that you want to ring before the others. Press **OK**. Display shows **RING DELAY**. Press  or  to choose how many rings before the other handsets rings, 2, 4, 6, or 8 then press **OK** to confirm.

Dial mode

Your BT Freestyle 4500 is pre-set to Tone dialling. You can switch to Pulse dialling which may be necessary if you are using your BT Freestyle 4500 with an older style switchboard.

1. Press **MENU**. Scroll  to display **BASE SETTINGS** and press **OK**.
2. Scroll  to **DIAL MODE** and press **OK**. The current setting is indicated with a ✓. Press  or  to highlight **TONE** or **PULSE** and press **OK** to confirm.



It is possible to switch from pulse to tone by pressing .




Recall mode

Recall is used with some switchboard features and some BT Calling Features.

It is pre-set to Timed Break which is correct for direct exchange lines and most switchboards. For some switchboards you may need to select Earth (consult your switchboard supplier). When pulse dialling is chosen only earth break recall is available.

To change the recall type



1. Press **MENU**. Scroll  to display **BASE SETTINGS** and press **OK**.
2. Scroll  to **RECALL MODE** and press **OK**.

The current setting is indicated with a . Press  or  to highlight **TIMED BREAK** or **EARTH** and press **OK** to confirm.

Base PIN

Your base uses a 4-digit PIN as a security code when registering and de-registering new handsets. The original setting is 0000.

To change the PIN

1. Press **MENU**. Scroll  to display **BASE SETTINGS** and press **OK**. Scroll  to **CHANGE SYSTEM PIN** and press **OK**.

2. Enter the current PIN and press **OK**.
3. Display shows ENTER NEW PIN. (Original setting 0000). Enter the new 4-digit PIN you want and press **SAVE**.
4. Enter the new PIN again to confirm and press **SAVE**. Display shows SYSTEM PIN CHANGED.

Base setting defaults

Setting	Options	Default
Base ringer melody	5 melodies	1
Base ringer volume	5 levels and off	5
Dial mode	Pulse and Tone	Tone
System PIN		0000
Recall mode	Timed Break and Earth	Time Break
Handset priority	All handsets or an individual handset	All handsets

Additional handsets and bases





If Registration fails, try again.
If you can still not get your handset to register, call the BT Freestyle Helpline on 0870 240 3962.

Registering new handsets

You can register up to 5 handsets to your BT Freestyle 4500 base.





If you have purchased a Twin, Trio or Quad the handsets in these packs are already pre-registered to the main base.

However if you purchase additional Freestyle 4500 handsets separately you will need to register them to the base first for them to work.

1. When you switch on a new Freestyle 4500 handset, the display shows REGISTER HANDSET? Press **OK**. Display shows SELECT BASE.
2. Press  or  to select the base number and press **OK**. If the handset is new then choose Base 1, if it has been registered to other bases choose the first number not marked with a *.
3. Enter the base PIN (original setting 0000) and press **OK**.
4. Press **and hold** the  button on the base for around 10 seconds. When the base beeps, **release** the  button. The handset is automatically assigned the next available handset number. The handset will beep when registration has taken place.

De-registering a handset

You can de-register any handset from a base using any handset registered to an in range base.


1. Press **MENU** then scroll  to **REGISTRATION** and press **OK**. Display shows **REGISTER HANDSET**. Press  to display **DE-REGISTER HANDSET** and press **OK**.
2. Enter the 4 digit base PIN (original setting 0000) and press **OK**. Press  or  to select the handset you want to de-register.
3. Press **OK**. Display asks you to confirm de-registration. Press **OK**. Display confirms de-registration.

Transferring calls and 3-Way calls

When you are on a call you can transfer the call to another BT Freestyle 4500 handset. You can also bring another handset in on the call to have a 3-way call.


Transferring a call

When you are on a call:-

1. Press , the display shows **CALL HANDSET** and the other handset numbers.

Customer Helpline

If you experience any difficulties please call the Helpline on 0870 240 3962 or email bt.freestyle.helpdesk@vtecheurope.com

You can't use the  button until the caller timer is shown in the display.

If the other handset doesn't answer you can stop the ringing and retrieve the original call by pressing **Switch**.

You can't use the **Int** button until the caller timer is shown in the display.

If the other handset doesn't answer you can stop the ringing and retrieve the original call by pressing **Switch**.

2. Use the **▲** or **▼** buttons to select the handset you want to transfer the call to, then press **OK**. Alternatively, just press the number of the handset you want, e.g. to call handset 2 press **2**. The external party is put on hold and the called handset rings.
3. When the second handset answers you will be able to speak to them without the external party hearing. To transfer the call just hang up on the originating handset.

3-Way calls




When you are on a call:-

1. Press **Int**, the display shows **CALL HANDSET** and the other handset numbers.
2. Use the **▲** or **▼** buttons to select the handset you want to bring in on the call, then press **OK**. Alternatively, just press the number of the handset you want, e.g. to call handset 2 press **2**. The external party is put on hold and the called handset rings.
3. When the second handset answers you will be able to speak to them without the external party hearing.
4. You can now speak to either party individually, pressing **Switch** to alternate between the two, or press **Join** to bring all three parties together. Either handset can leave the call at any time just by hanging up.

Using additional bases

Selecting another base.

You can use your handsets with up to 4 different bases. When you have registered a handset to more than one base, you can switch between bases.

1. Press **MENU**. Press  to scroll to **HANDSET SETTINGS**. Press **OK**, then scroll  to **SELECT BASE** and press **OK**. All bases your handset is registered with are displayed. The current base is ticked.
2. Scroll  to the base you want to use and press **OK**.

Purchasing additional BT Freestyle 4000 handsets

You are able to purchase additional individual or multiple handsets and chargers via the BT helpdesk number **0870 240 3962**. Prices are set at RRP inc.VAT plus postage and packing.

Additional handsets and chargers include:

1 x Handset	2 x AAA rechargeable batteries
1 x Charger	1 x Beltclip
1 x Power supply line cord	Comprehensive user guide

Lounge

Stylish design and colour to compliment most decors.



Kitchen

Rubber grips and wipe clean keypad.



Bedroom

Built-in torch.




Replacing the handset batteries

After a time, you may find that the handset batteries are running out of charge more quickly. This is a standard sign of wear and the batteries will need replacing.

For spare AAA NiMH rechargeable batteries please contact the BT Freestyle Helpline 0870 240 3962.

Slide off the battery compartment cover. Install the batteries as shown.

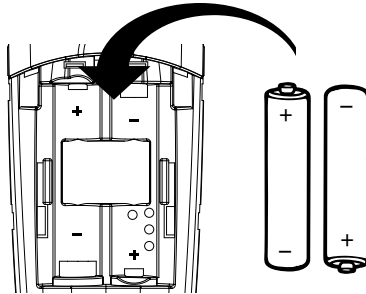

Slide the battery compartment cover back into place.

Do not immerse the batteries in water or throw them onto a fire, or dispose of them with ordinary domestic refuse.

Never use non-rechargeable batteries. Only fit rechargeable Nickel Metal Hydride (NiMH) AAA. Using the wrong type of batteries will invalidate your guarantee and may damage the phone.

BT accepts no responsibility for damage caused to your BT Freestyle 4500 by using any other type of battery.

Calls do not get through to a connected fax machine


Check that the answer delay setting (the number of rings before your answering machine pick up the call) is set to 2 or 4, see page 53 and that your outgoing message is short.


Check that the sending machine is transmitting fax tones. Older machines may not do this.

If you are still having problems, try shortening the silence detection time on your fax machine/fax modem. See your fax user guide for details.

Fax machine interrupts callers trying to leave messages on the answering machine

The fax may be detecting periods of silence during the incoming message and switching to fax reception mode. Try increasing the silence detection time on your fax machine/fax modem or switch it off completely. See your fax user guide for details.

Problems	Possible cause
No display appears	<p>The handset may be switched off. Press <i>and release</i> the  button to switch the handset on.</p> <p>The batteries may be flat, dead or incorrectly inserted. Recharge, replace or renew the batteries.</p>
No dial tone	<p>Make sure your handset is registered to the base and within range of the base.</p> <p>Is the telephone cord of the base plugged into the phone socket?</p> <p>Check that the base station is connected to the mains power and switched on.</p>
You cannot link up with the base station	<p>Does the display show <i>Out of Range</i>? If so, you are out of range of the base the handset is registered to or power is off at the base.</p> <p>Batteries could be low or flat.</p> <p>If using more than one base station, check that you have the correct base selected.</p>

Problems	Possible cause
Handset does not ring	<p>The ringer volume may be switched off (if it is there will be a RINGER OFF ICON in the display. Press <i>and hold</i>  to switch it off and on. To adjust the ringer volume on the handset, <i>see page 63</i>.</p> <p>Check that the base station is plugged into the phone socket and mains power and switched on.</p>
Buzzing noise on my radio, TV, computer	<p>Sometimes your BT Freestyle 4500 can interfere with other electrical equipment if it is placed too close.</p> <p>It is recommended that you place your BT Freestyle 4500 handset at least one metre away from such appliances to avoid any risk of interference.</p>

Possible problems with SMS

Problems	Possible cause
<p>SMS messages cannot be sent and screen displays <small>unable to send.</small></p>	<p>The base station power supply or telephone line cord might not be properly connected. Check that the base station power supply is plugged into the mains socket and switched on and that the telephone is plugged into the telephone wall socket.</p> <p>There might be a fault on the line. Check your telephone line is working properly.</p> <p>You might have deleted the server number in error. Refer to pages 45-46 for instructions on how to enter the number.</p> <p>Your SMS memory might be full. Delete unwanted text messages, see page 44.</p> <p>More than one SMS product plugged into the line. Remove other products.</p>
<p>Cannot send text</p>	<p>Check service centre number is correct including 1470 prefix.</p> <p>Check call barring (option 4) is not activated on your line if you have the call barring service rented from BT.</p>

Problems	Possible cause
Cannot receive text	<p>Check service centre number is correct.</p> <p>Ensure you have subscribed to a Caller Display service and that it is active. You can check this by noting if your phone displays data regarding your caller's number when you receive an incoming call.</p>
Handset is registered to the SMS service and text has been previously sent and received but you are now only receiving incoming messages as voice text	<p>This may be due to your handset being de-registered. All you need to do is type Register and send it to 00000. You will receive a confirmation message back. This assumes that your Caller Display service is active and working on your line.</p> <p>Note: Messages sent to 00000 are not charged for.</p>

Further help and advice for SMS related queries on BT lines:

BT Residential customers – call 151, choose option 2, when prompted by the Fault Management Service select option 2, input your phone number on the handset and wait to speak to a customer adviser.

BT Business customers – call 154, choose option 2, when prompted by the Fault Management Service select option 2, input your phone number on the handset and wait to speak to a customer adviser.

For other telephone service providers please contact their customer services.

General sales enquiries:

BT Residential lines – call 150. BT Business lines – call 152.

For other telephone service providers please contact their customer services.

Billing enquiries:

Refer to the telephone number shown on your telephone bill.

Other functions and services available from the SMS service

By sending the following commands to the BT text self administration facility you can control functions and capabilities in your SMS phone and the way messages are handled.

Press **MENU**, then **OK twice**. Type in the following commands (depending upon what you wish to do) and send to 00000.

*** 1 #** This will enable you to opt out from receiving voice text messages.

- # 1 #** Turns off the opt out option.
- * 2 #** Turns on permanent voice text message delivery to your phone.
This means *all* incoming text is delivered as voice text.
- # 2 #** Turns off permanent voice text message delivery.

If you are sending a message from a fixed line phone to another fixed line phone.

- * 3 #** Forces a message sent to be delivered as voice text even though the recipient may have an SMS enabled phone and usually receives written text.

This command is inserted at the start of the message and applies only to that message, e.g. *** 3 #** *“Hello I will be home late”*.

If you are sending a message from a fixed line phone and require a status report.

- * 0 #** Will allow a status report to be sent back to you when you have sent a message to confirm delivery. Place *** 0 #** at the start of your text message. Write the message and send it. You will receive a reply text back to your phone giving the status report for that message.

BT Freestyle 4500 Helpline

0870 240 3962 or email

bt.freestyle.helpdesk@vtecheurope.com

Call the dedicated BT Freestyle 4500 Helpline:

- if you are having difficulties using your BT Freestyle 4500;
- if you need replacement batteries or mains power lead.

Lines open 9am – 5.30pm, Monday to Friday.
9.30am – 2.30pm Saturday.

BT accessories and replacement items

For a full range of accessories and replacement items for BT products please call 0870 240 5522, or visit:



You must subscribe to your network provider's caller display service before some of the features on your BT Freestyle 4500 will work. A quarterly fee is payable.

IMPORTANT

This equipment is not designed for making emergency telephone calls when the power fails. Alternative arrangements should be made for access to emergency services.

This product is intended for connection to analogue public switched telephone networks and private switchboards in the United Kingdom.

Safety

General

- Only use the power supply suitable for the BT Freestyle 4500 base or chargers. Using an unauthorised power supply will invalidate your guarantee and may damage the telephone.
- Use only the approved rechargeable batteries supplied. Spare rechargeable batteries are available from the Freestyle Helpline 0870 240 3962.
- If the keypad is locked, it is still possible to make emergency calls to 999 and 112 numbers.
- Radio signals transmitted between the handset and base may cause interference to hearing aids.
- It is recommended that advice from a qualified expert is sought before using this product in the vicinity of emergency/intensive care medical equipment.

- It is recommended that if you have a pacemaker fitted you check with a medical expert before using this product.
- Never dispose of batteries in a fire. There is a serious risk of explosion and/or the release of highly toxic chemicals.

Cleaning

- Simply clean the handset and base with a damp (not wet) cloth, or an anti-static wipe. Never use household polish as this will damage the product. Never use a dry cloth as this may cause a static shock.

Environmental

- Do not expose to direct sunlight.
- The product may heat up when the batteries are being recharged or during prolonged periods of use. This is normal. However, we recommend that to avoid damage you do not place the product on antique/veneered wood.
- Do not submerge any part of your product in water and do not use it in damp or humid conditions, such as bathrooms.
- Do not expose your product to fire, explosive or other hazardous conditions.
- There is a slight chance your phone could be damaged by and electrical storm. We recommend that you unplug the power and telephone line cord from the base for the duration of the storm.

Technical information

How many telephones can you have?

All items of telephone equipment have a Ringer Equivalence Number (REN), which is used to calculate the number of items which may be connected to any other telephone line. Your BT Freestyle 4500 has a REN of 1. A total REN of 4 is allowed. If the total REN of 4 is exceeded, the telephone may not ring.

With different telephone types there is no guarantee of ringing, even when the REN is less than 4.

- Only use the supplied mains power adaptors, item code 010091 for the base station and 010093 for the charger.
- Only use approved AAA NiMH rechargeable batteries.

Connecting to a switchboard

Switchboard compatibility

This product is intended for use within the UK for connection to the public telephone network and compatible switchboards, which support tone dialling, timed break recall or earth recall. If in doubt please consult your service provider.

Switchboard external line access code

You may need to enter an access code (e.g. 9) in order to get an outside line. So that the switchboard has time to pick up an outside line, you may also need to add a 'pause' after the access code.

Insert a 'pause' in a stored number

If you need to add a pause in the dialling sequence, follow the example given below:

9	P	0870 240 3962
Switchboard code for an outside line	Pause inserted in dialling sequence	Rest of number

When storing a number, at the point you want to insert a pause, press and hold 0 until P is displayed. You can enter as many pauses as required.

Guarantee

Your Freestyle 4500 handset is guaranteed for a period of 12 months from the date of purchase.

Subject to the terms listed below, the guarantee will provide for the repair of, or at BT's or its agent's discretion the option to replace the Freestyle 4500, or any component thereof, (other than batteries), which is identified as faulty or below standard, or as a result of inferior workmanship of materials. Products over 28 days old from the date of purchase may be replaced with a refurbished or repaired product.

The conditions of this guarantee are:

- The guarantee shall only apply to defects that occur within the 12 month guarantee period.
- Proof of purchase is required.
- The equipment is returned to BT or its agent as instructed.
- This guarantee does not cover any faults or defects caused by accidents, misuse, fair wear and tear, neglect, tampering with the equipment, or any attempt at adjustment or repair other than through approved agents.
- This guarantee does not affect your statutory rights.

Within the 12 month guarantee period:

If you experience difficulty using the product, prior to returning your product, please contact the BT Freestyle 4500 Help Desk for assistance 0870 240 3962 or email bt.helpdesk@vtecheurope.com

Outside of the 12 month guarantee period:

If your product needs repair after the guarantee period has ended, the repair must meet the approval requirements for connection to the telephone network. We recommend that you call the Helpline on 0870 240 3962 and ask for details of our recommended repair agents.

For your records

Date of purchase:

Place of purchase:

Serial number:

For guarantee purposes proof of purchase is required so please keep your receipt.

Enter your BT Freestyle 4500
Remote access code here:

[/ / /]

(see page 58 for more information)

Enter your base PIN here:

[/ / /]

(see page 72 for more information)

R&TTE

This product is intended for use within the UK for connection to the public telephone network and compatible switchboards.

This equipment complies with the essential requirements for the Radio Equipment and Telecommunications Terminal Equipment Directive 1999/5/EC.

Declaration of Conformance

Hereby, Vtech declares that this BT Freestyle 4500 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

For a copy of the Declaration of Conformity, please contact the BT Helpline on 0870 240 3962.

Visit us at www.bt.com



Offices worldwide

The telecommunications services described in this publication are subject to availability and may be modified from time to time. Services and equipment are provided subject to British Telecommunications plc's respective standard conditions of contract. Nothing in this publication forms any part of any contract.

© British Telecommunications plc 2004.
Registered Office: 81 Newgate Street, London EC1A 7AJ.
Registered in England No. 1800000.
BT Freestyle 4500 Issue 3 (04/04) 2
Designed and produced by The Art & Design Partnership Ltd.
Printed in China

